

Beltrac® 3000 Series

Product innovation engineered for the real world.™



Features & Benefits:

Premium Post Design

- One-piece, continuous construction.
- Belt mechanism completely concealed within post.
- Belt mechanism is easily field replaced.
- Post can receive all major manufacturer's belts.

4-Way Dovetail Connection

- Standard 4-way connection allows post to deliver one belt while simultaneously receiving three belts or accessories.
- Belt ends connect to all major manufacturers' posts.

Superior Base Design

- Weighted steel base for superior stability.
- Factory applied, slotted rubberized base protects flooring and promotes air flow, allowing wet floors to dry quickly.
- Optional galvanized base for outdoor use.

Slow Retracting Belt

- Unique, centrifugal belt-braking system ensures a slow and safe retraction.

Beltloc™ – Automatic Belt Locking Option

- Optional metal lock prevents accidental release of belts.
- Locks post-top signs and accessories in place.

NeXtrac® Ready

- Easily add accessories to create flexible, in-line NeXtrac® merchandising systems.
- Simple, one-step grip connectors easily attach into "dovetail" grooves.

Warranty

- 5 years on posts.
3 years on mechanism.

© 2020 Lavi Industries All Rights Reserved.


 **Lavi Industries**
Products for People and the Places They Go®

Beltrac® 3000 Series

Product innovation engineered for the real world.™



3000



3100




3000DL



3100DL



3548

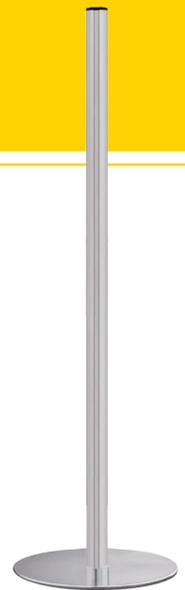

3048, 3005, 3006

	BELTRAC® 3000	BELTRAC® 3000-13	BELTRAC® 3000 Double Belt	BELTRAC® 3000-13 Double Belt	BELTRAC® 3000 Mid-Belt Tall Posts	BELTRAC® 3000 No Belt Tall Posts
Height	40 inches	40 inches	40 inches	40 inches	52", 66", 72"	48", 52", 66", 72"
Weight	25.5 - 28 lbs.	27.5 - 30 lbs.	25.5 - 28 lbs.	27.5 - 30 lbs.	Varies by height	Varies by height
Finish	Anodized or Lido-Tone®	Anodized Satin or Lido-Tone®	Anodized or Lido-Tone®	Anodized Satin or Lido-Tone®	Anodized or Lido-Tone® (WB, SA, GD on 48")	Anodized or Lido-Tone® (WB, SA, GD on 48")
Post Diameter	2 ¾ inches	3 ¼ inches	2 ¾ inches	3 ¼ inches	2 ¾ inches	2 ¾ inches
Post Construction	Extruded Aluminum	Extruded Aluminum	Extruded Aluminum	Extruded Aluminum	Extruded Aluminum	Extruded Aluminum
Base Connection	Aluminum Insert	Aluminum Insert	Aluminum Insert	Aluminum Insert	Aluminum Insert	Aluminum Insert
Base Options	14" Sloped or 14.5" Slim	14" Sloped or 14.5" Slim	14" Sloped or 14.5" Slim	14" Sloped or 14.5" Slim	14" sloped or 18" Slim Base	14" sloped or 18" Slim Base
Base Cover	Metal or Plastic	Metal or Plastic	Metal or Plastic	Metal or Plastic	Metal or Plastic	Metal or Plastic
Rubberized Base	Standard	Standard	Standard	Standard	Standard	Standard
Belt Color	All	All	All	All	All	N/A
Belt Length	10 feet	15 feet	10 feet	15 feet	10 feet	N/A
Slow Retracting Belt	Standard	Standard	Standard	Standard	Standard	N/A
Beltloc™	Additional	Additional	Additional	Additional	Additional	N/A
4-Way Connection	Standard	Standard	Standard	Standard	Standard	Optional
Signage Ready	Yes	Yes	Yes	Yes	Yes	Yes
NeXtrac® Ready	Yes	Yes	Yes	Yes	Yes	Yes
Outdoor Usage	Add-on, Please call	Add-on, Please call	Add-on, Please call	Add-on, Please call	Add-on, Please call	Add-on, Please call

Related Products:



Wall Receptacle



Digital Belt Imprinting



Post-Top Signs & Graphics



NeXtrac® In-Line Merchandising



Beltloc™ Locking Mechanism



Floor Sockets